




# ULTIMATE FLOODLIGHT GEN. 2



  
100-240Volts  
50/60Hz



  
IP65

  
IK07/08

The Ultimate Flood Light Gen. 2 series offers a versatile and compact range of floodlights, designed with different output levels and boasting an impressive efficiency of up to 200 LM/W. These floodlights are suitable for a wide array of applications, including wall-mounted installations around building facades.

They are ideal for both classic flood lighting of buildings and illuminating outdoor areas. In comparison to traditional floodlights, Honeywell Ultimate Floodlights provide immediate light without any startup or cooling-down times. With their robust aluminum housing and safety glass cover, these flood lights are specifically crafted for outdoor use, ensuring durability and reliability in various weather conditions.

# APPLICATION AREAS



## FEATURES

- Illuminate with stunning efficiency, thanks to our lighting's luminous efficacy of up to 200 lm/W
- Experience enduring performance with an impressive lifetime of 50,000 hours (L70/B50) with 5 years of warranty
- Effortlessly customize your ambiance with four color temperature options: 3000K, 4000K and 6500K
- Operate seamlessly in temperatures ranging from -30°C to +50°C with our meticulously designed lighting
- Experience hassle-free compatibility with our lighting, supporting rated 100-240V input voltage according to MEA approbation regulation. Designed to be able to work under 277V input and an operating frequency of 50/60Hz.
- Expanded Illumination: With a beam angle of 110 degrees, our product can cover a larger area, eliminating dark spots and ensuring a well-lit environment
- Equipped with a robust surge protection design up to 4KV, ensuring optimal safety for your electronics during voltage spikes

## TECHNICAL SPECIFICATIONS

MODEL NUMBER	ITEM DESCRIPTION	RATED POWER	RATED LUMENS	RATED CCT	RATED EFFICACY	OPERATING VOLTAGE	CRI	PF
84193004701	Ultimate Floodlight 16W 3000K 100-240V ND	16 W	2700 LM	3000 K	170 LM/W	100-240V	>80	>0.9
84194004702	Ultimate Floodlight 16W 4000K 100-240V ND	16 W	3000 LM	4000 K	187 LM/W			
84196504703	Ultimate Floodlight 16W 6500K 100-240V ND	16 W	3000 LM	6500 K	187 LM/W			
84193004728	Ultimate Floodlight 22W 3000K 100-240V ND	22 W	3600 LM	3000 K	165 LM/W			
84194004729	Ultimate Floodlight 22W 4000K 100-240V ND	22 W	4000 LM	4000 K	182 LM/W			
84196504730	Ultimate Floodlight 22W 6500K 100-240V ND	22 W	4000 LM	6500 K	182 LM/W			
84193004731	Ultimate Floodlight 25W 3000K 100-240V ND	25 W	4050 LM	3000 K	162 LM/W			
84194004732	Ultimate Floodlight 25W 4000K 100-240V ND	25 W	4500 LM	4000 K	180 LM/W			
84196504733	Ultimate Floodlight 25W 6500K 100-240V ND	25 W	4500 LM	6500 K	180 LM/W			
84193004704	Ultimate Floodlight 30W 3000K 100-240V ND	30 W	5400 LM	3000 K	180 LM/W			
84194004705	Ultimate Floodlight 30W 4000K 100-240V ND	30 W	6000 LM	4000 K	200 LM/W			
84196504706	Ultimate Floodlight 30W 6500K 100-240V ND	30 W	6000 LM	6500 K	200 LM/W			
84193004707	Ultimate Floodlight 40W 3000K 100-240V ND	40 W	7200 LM	3000 K	180 LM/W			
84194004708	Ultimate Floodlight 40W 4000K 100-240V ND	40 W	8000 LM	4000 K	200 LM/W			
84196504709	Ultimate Floodlight 40W 6500K 100-240V ND	40 W	8000 LM	6500 K	200 LM/W			
84193004710	Ultimate Floodlight 50W 3000K 100-240V ND	50 W	9000 LM	3000 K	180 LM/W			
84194004711	Ultimate Floodlight 50W 4000K 100-240V ND	50 W	10000 LM	4000 K	200 LM/W			
84196504712	Ultimate Floodlight 50W 6500K 100-240V ND	50 W	10000 LM	6500 K	200 LM/W			
84193004713	Ultimate Floodlight 75W 3000K 100-240V ND	75 W	13500 LM	3000 K	180 LM/W			
84194004714	Ultimate Floodlight 75W 4000K 100-240V ND	75 W	15000 LM	4000 K	200 LM/W			
84196504715	Ultimate Floodlight 75W 6500K 100-240V ND	75 W	15000 LM	6500 K	200 LM/W			
84193004716	Ultimate Floodlight 100W 3000K 100-240V ND	100 W	18000 LM	3000 K	180 LM/W			
84194004717	Ultimate Floodlight 100W 4000K 100-240V ND	100 W	20000 LM	4000 K	200 LM/W			
84196504718	Ultimate Floodlight 100W 6500K 100-240V ND	100 W	20000 LM	6500 K	200 LM/W			


Note: Check with your local sales organization for ordering codes

# TECHNICAL SPECIFICATIONS

MODEL NUMBER	ITEM DESCRIPTION	RATED POWER	RATED LUMENS	RATED CCT	RATED EFFICACY	OPERATING VOLTAGE	CRI	PF
84193004719	Ultimate Floodlight 125W 3000K 100-240V ND	125 W	22500 LM	3000 K	180 LM/W	100-240V	>80	>0.9
84194004720	Ultimate Floodlight 125W 4000K 100-240V ND	125 W	25000 LM	4000 K	200 LM/W			
84196504721	Ultimate Floodlight 125W 6500K 100-240V ND	125 W	25000 LM	6500 K	200 LM/W			
84193004722	Ultimate Floodlight 150W 3000K 100-240V ND	150 W	27000 LM	3000 K	180 LM/W			
84194004723	Ultimate Floodlight 150W 4000K 100-240V ND	150 W	30000 LM	4000 K	200 LM/W			
84196504724	Ultimate Floodlight 150W 6500K 100-240V ND	150 W	30000 LM	6500 K	200 LM/W			
84193004734	Ultimate Floodlight 160W 3000K 100-240V ND	160 W	28800 LM	3000 K	180 LM/W			
84194004735	Ultimate Floodlight 160W 4000K 100-240V ND	160 W	32000 LM	4000 K	200 LM/W			
84196504736	Ultimate Floodlight 160W 6500K 100-240V ND	160 W	32000 LM	6500 K	200 LM/W			
84193004725	Ultimate Floodlight 175W 3000K 100-240V ND	175 W	31500 LM	3000 K	180 LM/W			
84194004726	Ultimate Floodlight 175W 4000K 100-240V ND	175 W	35000 LM	4000 K	200 LM/W			
84196504727	Ultimate Floodlight 175W 6500K 100-240V ND	175 W	35000 LM	6500 K	200 LM/W			

Note: Check with your local sales organization for ordering codes

# PRODUCT SIZE

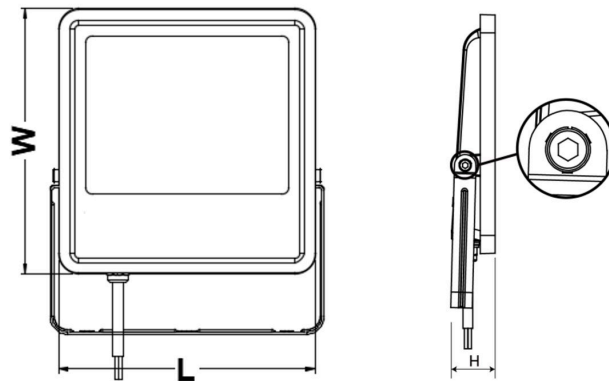

Power	Length (mm) ±3mm	Width (mm) ±3mm	Height (mm) ±2mm
16W/22W	120	145	34
25W/30W	157	175	40
40W/50W	181	202	40
75W, 100W	241	272	46
125W/150W/160W	282	318	50
175W	314	349	50

## VESRA MEA FZ - LLC

1907, Opal Tower, Business Bay, Dubai, UAE  
 Website: honeywell-lighting.com  
 Email: support@honeywell-lighting.com  
 Phone: +971 800 83 772

The Honeywell trademark is used under license from Honeywell International Inc. This product is manufactured by VESRA MEA FZ LLC

